

Features


- 4 ~ 10 ϕ , 105°C, 2,000 hours assured
- Vertical chip type miniaturized
- Low impedance capacitors
- Designed for surface mounting on high density PC board.
- RoHS Compliance



SPECIFICATIONS

Items	Performance										
Operating Temperature Range	$-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$										
Capacitance Tolerance	$\pm 20\%$ (at 120Hz, 20°C)										
Leakage Current (at 20°C)	I = 0.01CV or 3 (μA) whichever is greater (after 2 minutes) Where, C = rated capacitance in μF V = rated DC working voltage in V										
Dissipation Factor (Tan δ at 120Hz, 20°C)	Rated Voltage	6.3	10	16	25	35					
	Tan δ (max)	0.30	0.26	0.22	0.16	0.13					
Low Temperature Characteristics (at 120Hz)	Impedance ratio shall not exceed the values given in the table below.										
	Rated Voltage	6.3	10	16	25	35					
	Impedance Ratio	Z(-25°C)/Z(+20°C)	4	3	2	2					
		Z(-55°C)/Z(+20°C)	10	7	5	3					
Load Life Test	Test Time	2,000 hrs									
	Capacitance Change	Within $\pm 20\%$ of initial value ($\phi D \leq 6.3\text{mm} : \pm 25\%$)									
	Dissipation Factor	Less than 200% of specified value									
	Leakage Current	Within specified value									
	* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 2,000 hrs at 105°C.										
Shelf Life Test	Test time: 1,000 hrs; other items are the same as those for the load life test.										
Ripple Current & Frequency Multipliers	Frequency(Hz)	50, 60	120	1K	10K up						
	Multiplier	0.64	0.8	0.93	1.0						

DIAGRAM OF DIMENSIONS

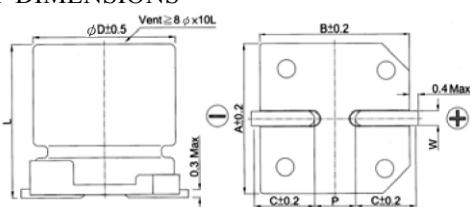


LEAD SPACING AND DIAMETER

Unit: mm


ϕD	L	A	B	C	W	P ± 0.2
4	5.7 ± 0.3	4.3	4.3	2.0	0.5 ~ 0.8	1.0
5	5.7 ± 0.3	5.3	5.3	2.3	0.5 ~ 0.8	1.5
6.3	5.7 ± 0.3	6.6	6.6	2.7	0.5 ~ 0.8	2.0
8	10 ± 0.5	8.4	8.4	3.0	0.7 ~ 1.1	3.1
10	10 ± 0.5	10.4	10.4	3.3	0.7 ~ 1.1	4.7
10	10.3 ± 0.5	10.4	10.4	3.3	0.7 ~ 1.1	4.7

MARKING

$\phi D \leq 6.3\text{mm}$

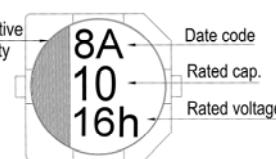

$\phi D = 8 \sim 10 \text{ mm}$

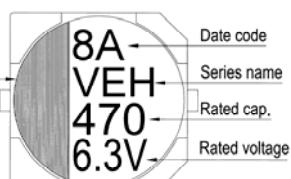

DIMENSION & PERMISSIBLE RIPPLE CURRENT

Dimension: $\phi D \times L(\text{mm})$

Ripple Current: mA/rms at 100K Hz, 105°C

Impedance: Ω / at 100K Hz, 20°C

μF Contents	V DC	6.3V (0J)			10V (1A)			16V (1C)			25V (1E)			35V (1V)		
		$\phi D \times L$	Imp.	mA	$\phi D \times L$	Imp.	mA	$\phi D \times L$	Imp.	mA	$\phi D \times L$	Imp.	mA	$\phi D \times L$	Imp.	mA
4.7	4R7										4×5.7	3.2	65	4×5.7	3.2	65
10	100							4×5.7	3.2	65	5×5.7	1.5	110	5×5.7	1.5	110
22	220							5×5.7	1.5	110	6.3×5.7	0.85	170	6.3×5.7	0.85	170
33	330	4×5.7	3.2	65	5×5.7	1.5	110	6.3×5.7	0.85	170	6.3×5.7	0.85	170	6.3×5.7	0.85	170
47	470	5×5.7	1.5	110	6.3×5.7	0.85	170	6.3×5.7	0.85	170	6.3×5.7	0.85	170	8×10	0.45	450
100	101	6.3×5.7	0.85	170	6.3×5.7	0.85	170	8×10	0.45	450	8×10	0.45	450	8×10	0.45	450
150	151	6.3×5.7	0.85	170	6.3×5.7	0.85	170	8×10	0.45	450	8×10	0.45	450	8×10	0.45	450
220	221	6.3×5.7	0.85	170	8×10	0.45	450	8×10	0.45	450	8×10	0.45	450	10×10	0.25	670
											10×10	0.25	670			
330	331	8×10	0.45	450	8×10	0.45	450	8×10	0.45	450	10×10.3	0.25	670			
470	471	8×10	0.45	450	8×10	0.45	450	10×10	0.25	670						
820	821	10×10	0.25	670	10×10	0.25	670									
1,000	102	10×10	0.25	670												